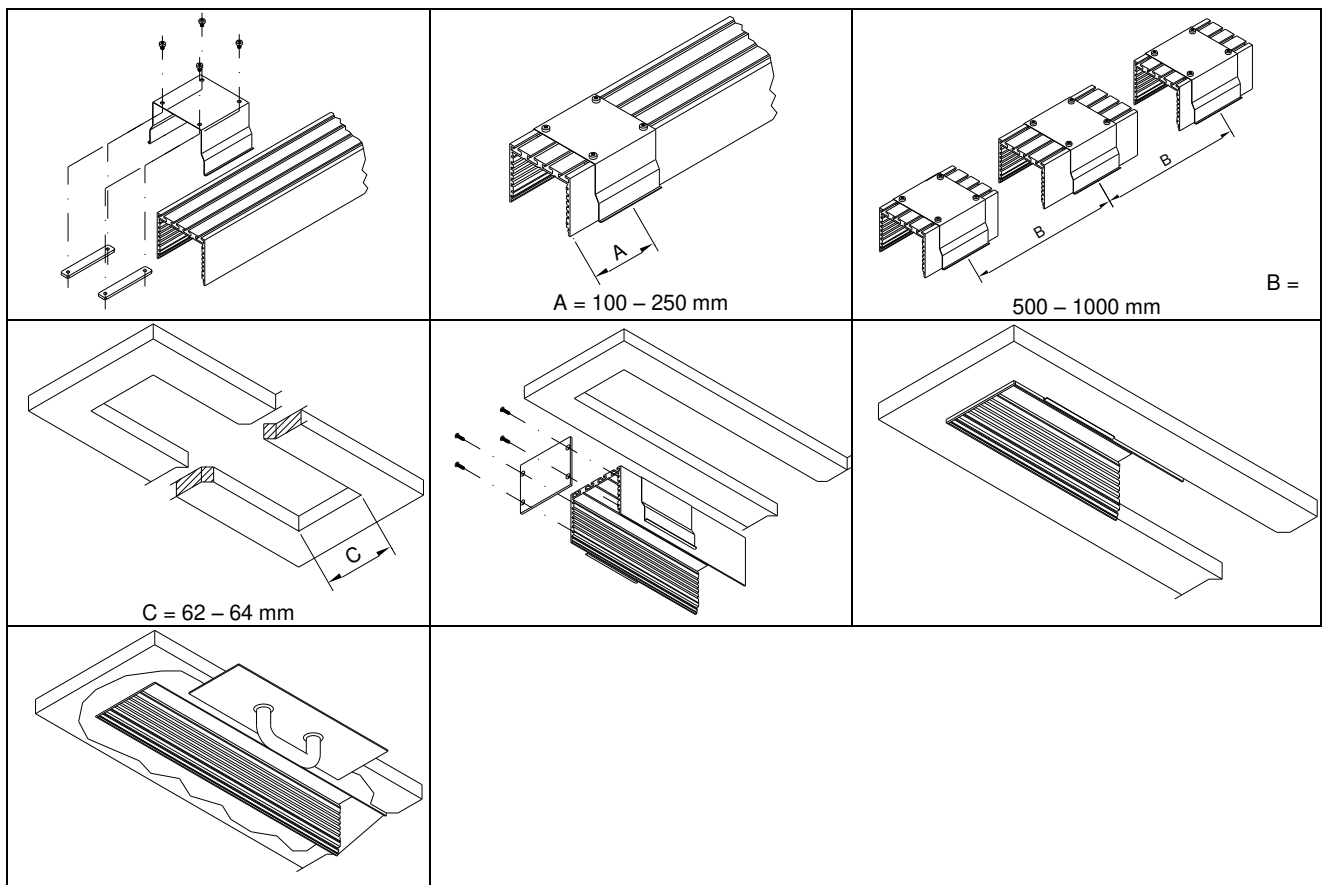


PROLED TRIMLESS CLIP 24**L690014x****Eigenschaften:**


- Bündiger Einbau in Gipskartondecken
- Tragfähigkeit bis zu 2 kg/Clip, bei korrektem Einbau
- Maximaler Abstand zwischen Clips 1 m.

Characteristics:

- *Flush installation in plasterboard ceilings*
- *Load capacity up to 2 kg/clip, depending on correct installation*
- *Maximum distance between clips 1 m.*

L-Line Standard 24 Profile

M-Line Standard 24 Profile

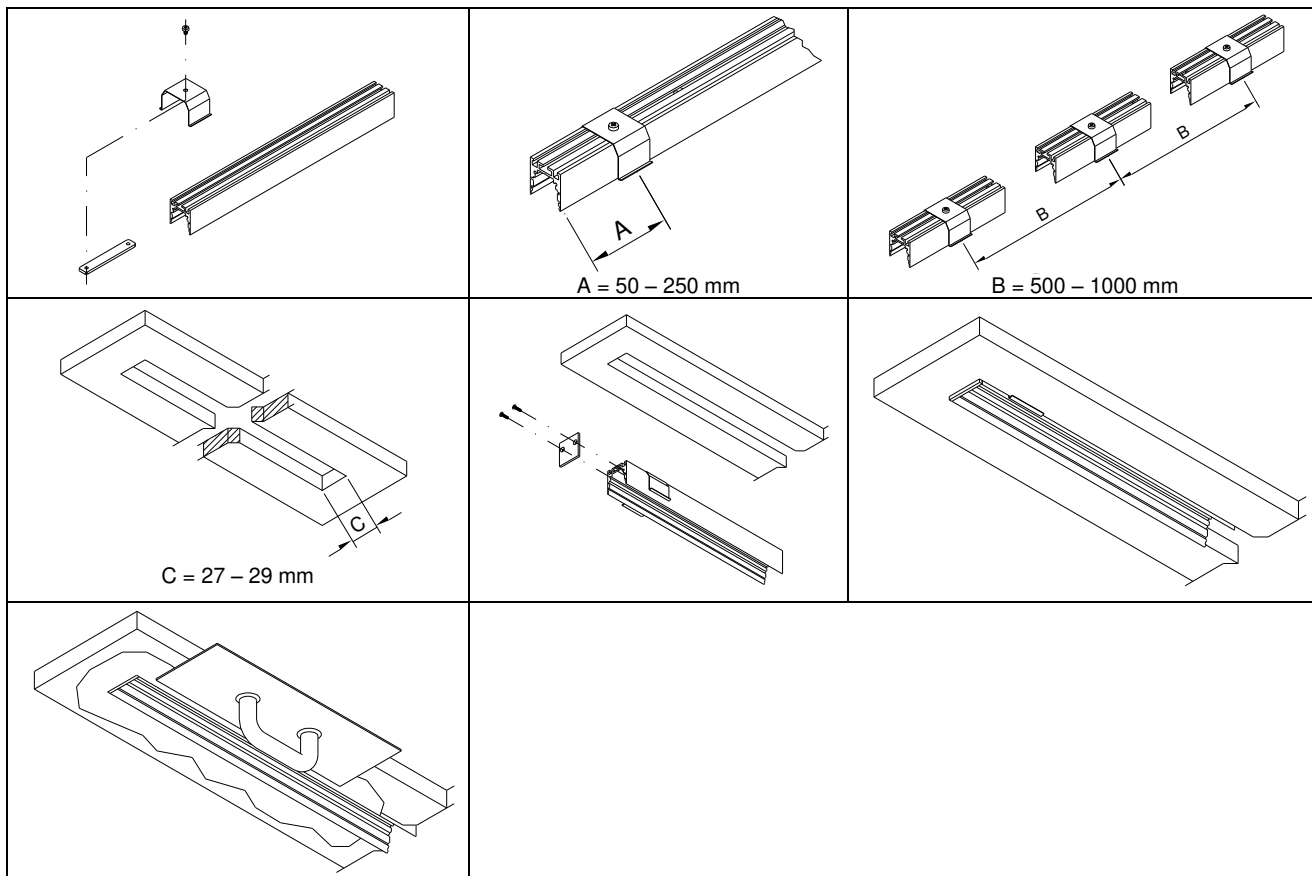

S-Line Standard 24 Profile

