


# Datasheet

PROLED SPOT LIGHT IP65 1x 2 Watts MONO

**PROLED**<sup>®</sup>

Article number: L173163BAC  
Article name: PROLED SPOT LIGHT IP65 1x 2 Watts MONO  
Article description: PROLED SPOT LIGHT IP65 1x2W ww 230 VAC  
GTIN: 4251158487502

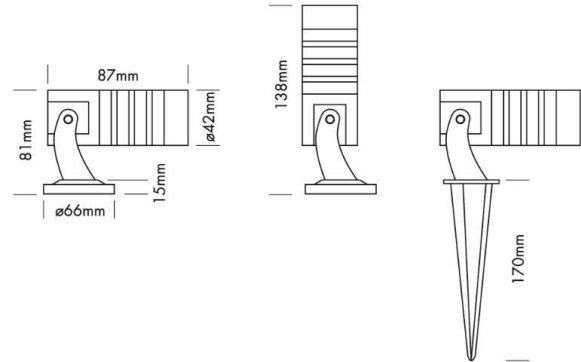

picture similar

## Article description:

The PROLED SPOT LIGHT IP65 is suitable for emphasis lighting indoors as well as outdoors. Combined with a ground spike it is also perfect for plant and garden lighting.

- dimmable and controllable with suitable PWM dimmers or MULTI power supplies/controllers

## Photometrical properties:

Light flux:	200 lm
Color appearance:	warm white
CCT:	3000 K
CRI:	80
Beam angle:	30 °

Date: 3.9.2024

Technical amendments and errors reserved.

**PROLED**<sup>®</sup>


MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

**Electrical properties:**

Voltage supply:	100 - 240 VAC ; 50 - 60 Hz
Electrical safety class:	I
Power consumption:	2,5 W
Luminaire luminous efficacy:	80 lm/W
EEC (EU 2019/2015):	
Control:	no

**Technical properties:**

Connection:	cable to open wires; 3 x 1 mm <sup>2</sup> ; 200 cm
IP safety class:	IP65 (for outdoor use)

**Housing and size:**


Size:	76 x 65 x 81 mm (l x w x h)
Housing colour:	black
Housing material:	alu
Housing surface:	shiny
Product weight:	0,400 kg

**Mounting instructions:**

For outdoor use:	✓
Mounting place:	Stand mounting, Wall-ceiling mounting, Floor installation
Mounting type:	screwable
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L <sub>80</sub> /B <sub>10</sub>

\*\* With correct installation and suitable thermal management.

**Spectral distribution:**

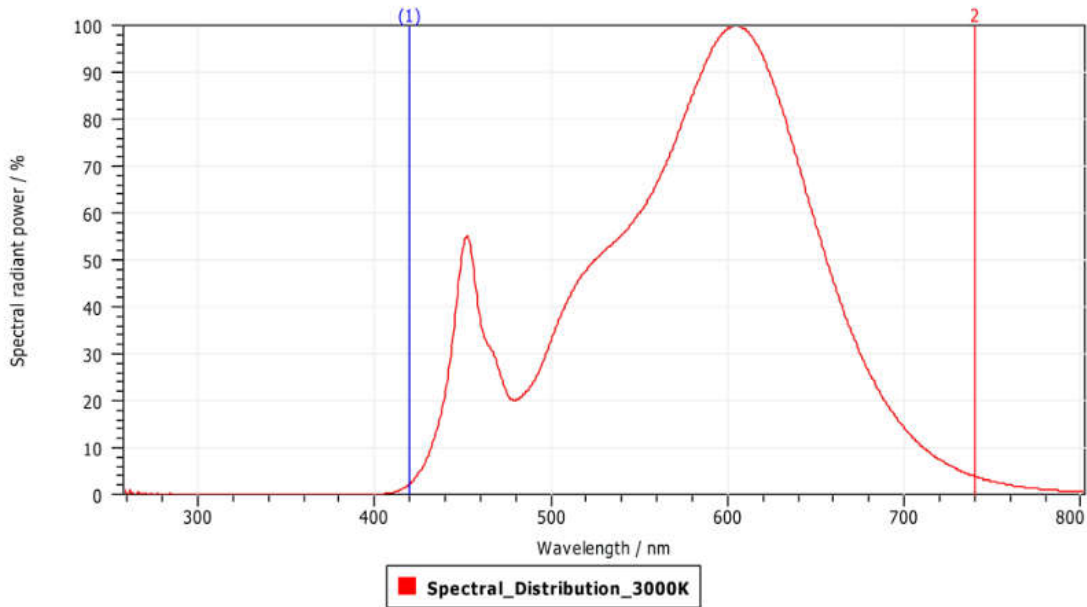

**Flags:**

