


Datasheet

PROLED SPOT LIGHT IP65 1x 3 Watts TRILED RGB

PROLED[®]

Article number: L17318B
Article name: PROLED SPOT LIGHT IP65 1x 3 Watts TRILED RGB
Article description: PROLED SPOT LIGHT IP65 1x3W TRILED RGB BLACK
GTIN: 4251158403717

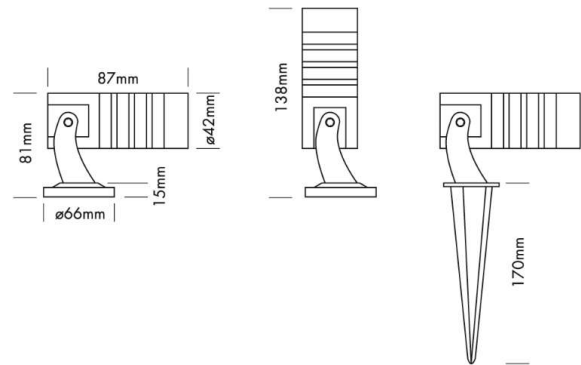

picture similar

Article description:

The PROLED SPOT LIGHT IP65 is suitable for emphasis lighting indoors as well as outdoors. Combined with a ground spike it is also perfect for plant and garden lighting.

- dimmable and controllable with suitable PWM dimmers or MULTI power supplies/controllers

Photometrical properties:

Light flux:	110 lm
Light flux red:	40 lm
Light flux green:	60 lm
Light flux blue:	10 lm
Color appearance:	RGB
Beam angle:	30 °

Date: 3.9.2024

Technical amendments and errors reserved.

PROLED[®]

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

Electrical properties:

Voltage supply:	24 VDC
Polarity connection:	Common Cathode (CC)
Electrical safety class:	III
Power consumption:	4 W
Luminaire luminous efficacy:	28 lm/W
Control:	with separate controller

Technical properties:

Connection:	Cable with IP68 plug male; 4 x 0.75 mm ² ; 200 cm
IP safety class:	IP65 (for outdoor use)
Adjustable:	Rotatable and swivelling
Reflector surface:	without

Housing and size:


Size:	76 x 65 x 81 mm (l x w x h)
Housing colour:	black
Housing material:	alu
Housing surface:	shiny
Product weight:	0,400 kg

Mounting instructions:

For outdoor use:	✓
Mounting place:	Stand mounting, Wall-ceiling mounting, Floor installation
Mounting type:	screwable
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.

Spectral distribution:

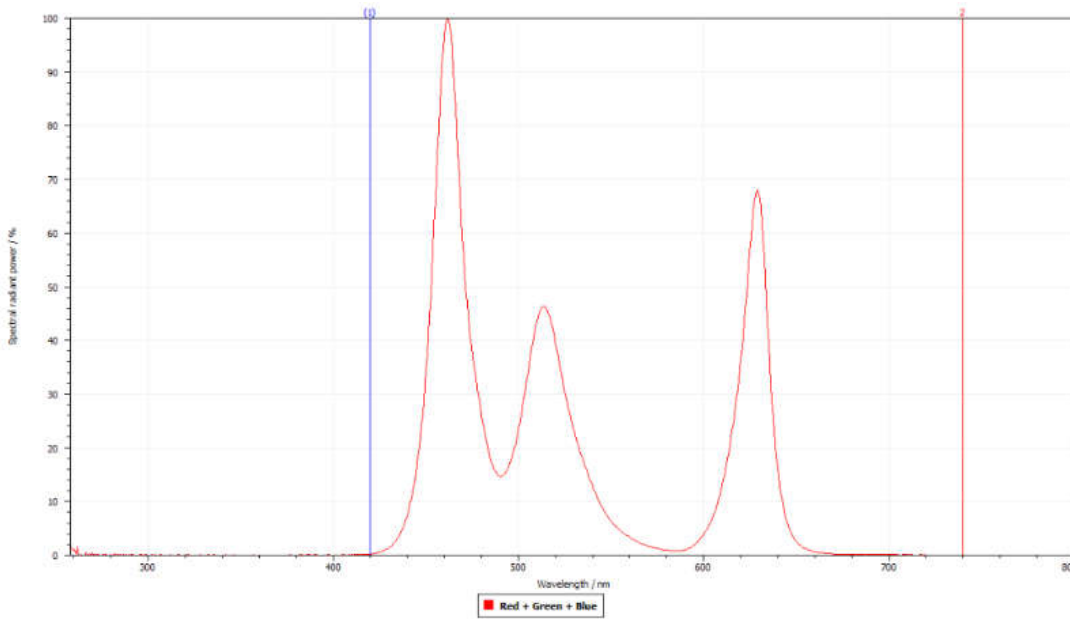

Flags:




Detail and realisation pictures:



Datasheet

PROLED SPOT LIGHT IP65 1x 3 Watts TRILED RGB

PROLED[®]



Date: 3.9.2024

Technical amendments and errors reserved.

PROLED[®]

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen