


Datasheet

PROLED SPOT LIGHT IP65 ARC COB XL



Article number: L173344X
Article name: PROLED SPOT LIGHT IP65 ARC COB XL
Article description: PROLED SPOT LIGHT IP65 ARC COB XL N-WHITE
GTIN: 4251158422435

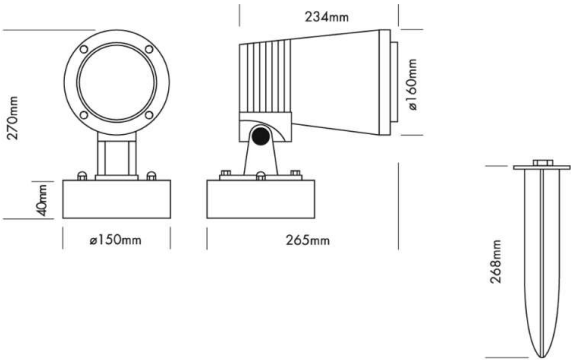

picture similar

Article description:

The PROLED SPOT LIGHT IP65 ARC is suitable for facades or architectural lighting indoors as well as outdoors.

- Simplified installation due to 230 VAC direct connection

Photometrical properties:

Light flux:	5000 lm
Color appearance:	neutral white
CCT:	4000 K
CRI:	80
Beam angle:	24 °

Date: 3.9.2024

Technical amendments and errors reserved.

Electrical properties:

Voltage supply:	100 - 240 VAC ; 50 - 60 Hz
Electrical safety class:	I
Power consumption:	48 W
Luminaire luminous efficacy:	104 lm/W
EEC (EU 2019/2015):	
Control:	no

Technical properties:

Connection:	cable to open wires; 3 x 1 mm ²
IP safety class:	IP65 (for outdoor use)
Adjustable:	swivelling
IK Code:	IK06

Housing and size:


Size:	234 x 150 x 270 mm (l x w x h)
Housing colour:	grey
Housing material:	alu
Housing surface:	matt
Product weight:	4,200 kg

Mounting instructions:


For outdoor use:	✓
Mounting place:	Stand mounting, Wall-ceiling mounting, Floor installation
Mounting type:	screwable
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.

Spectral distribution:

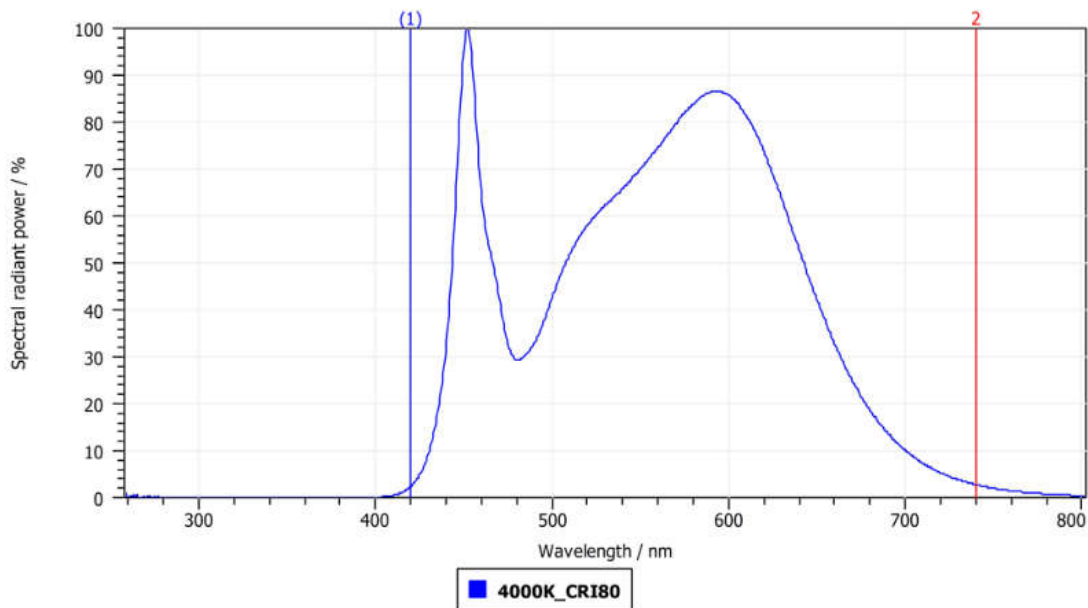

Flags:



Detail and realisation pictures:



