

Datasheet


PROLED SPOT LIGHT IP65 ARC COB SMALL



Article number: L173344S
Article name: PROLED SPOT LIGHT IP65 ARC COB SMALL
Article description: PROLED SPOT LIGHT IP65 ARC COB SMALL N-WHITE
GTIN: 4251158422398



picture similar

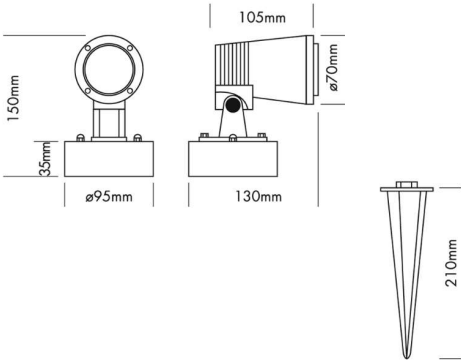

Article description:

The PROLED SPOT LIGHT IP65 ARC is suitable for facades or architectural lighting indoors as well as outdoors.

Photometrical properties:

Light flux:	800 lm
Color appearance:	neutral white
CCT:	4000 K
CRI:	80
Beam angle:	24 °

Electrical properties:

Voltage supply:	24 VDC
Electrical safety class:	III
Power consumption:	8 W
Luminaire luminous efficacy:	100 lm/W
EEC (EU 2019/2015):	
Control:	no

Date: 3.9.2024

Technical amendments and errors reserved.

Technical properties:

Connection:	cable to open wires; 2 x 1 mm ²
IP safety class:	IP65 (for outdoor use)
Adjustable:	swivelling
IK Code:	IK05

Housing and size:


Size:	130 x 95 x 150 mm (l x w x h)
Housing colour:	grey
Housing material:	alu
Housing surface:	matt
Product weight:	0,700 kg

Mounting instructions:


For outdoor use:	✓
Mounting place:	Stand mounting, Wall-ceiling mounting
Mounting type:	screwable
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.

Spectral distribution:

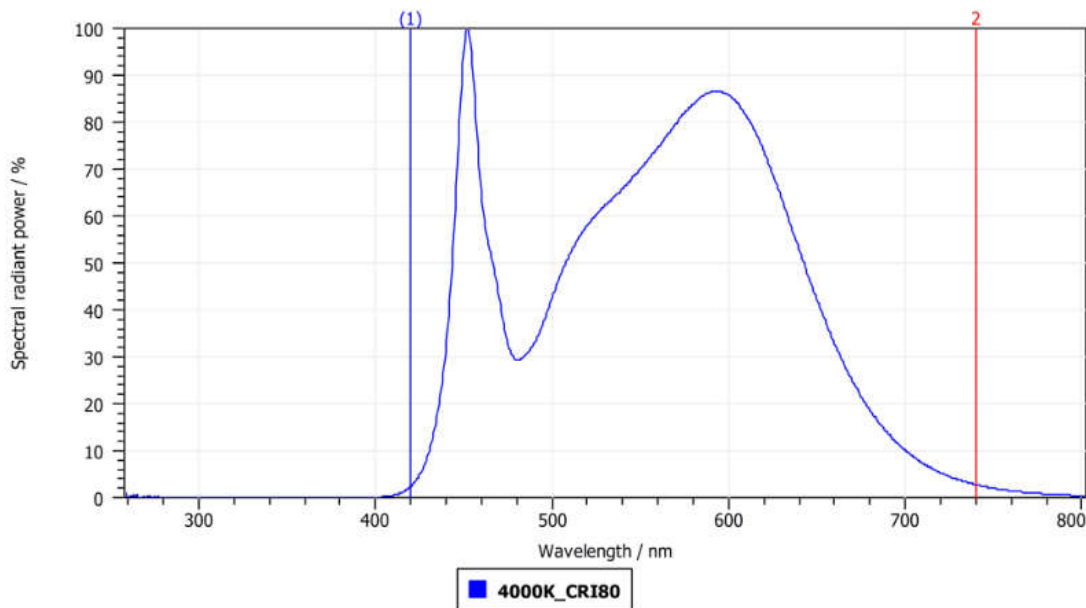

Flags:



Detail and realisation pictures:



Datasheet

PROLED SPOT LIGHT IP65 ARC COB SMALL

PROLED®



Date: 3.9.2024

Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen