




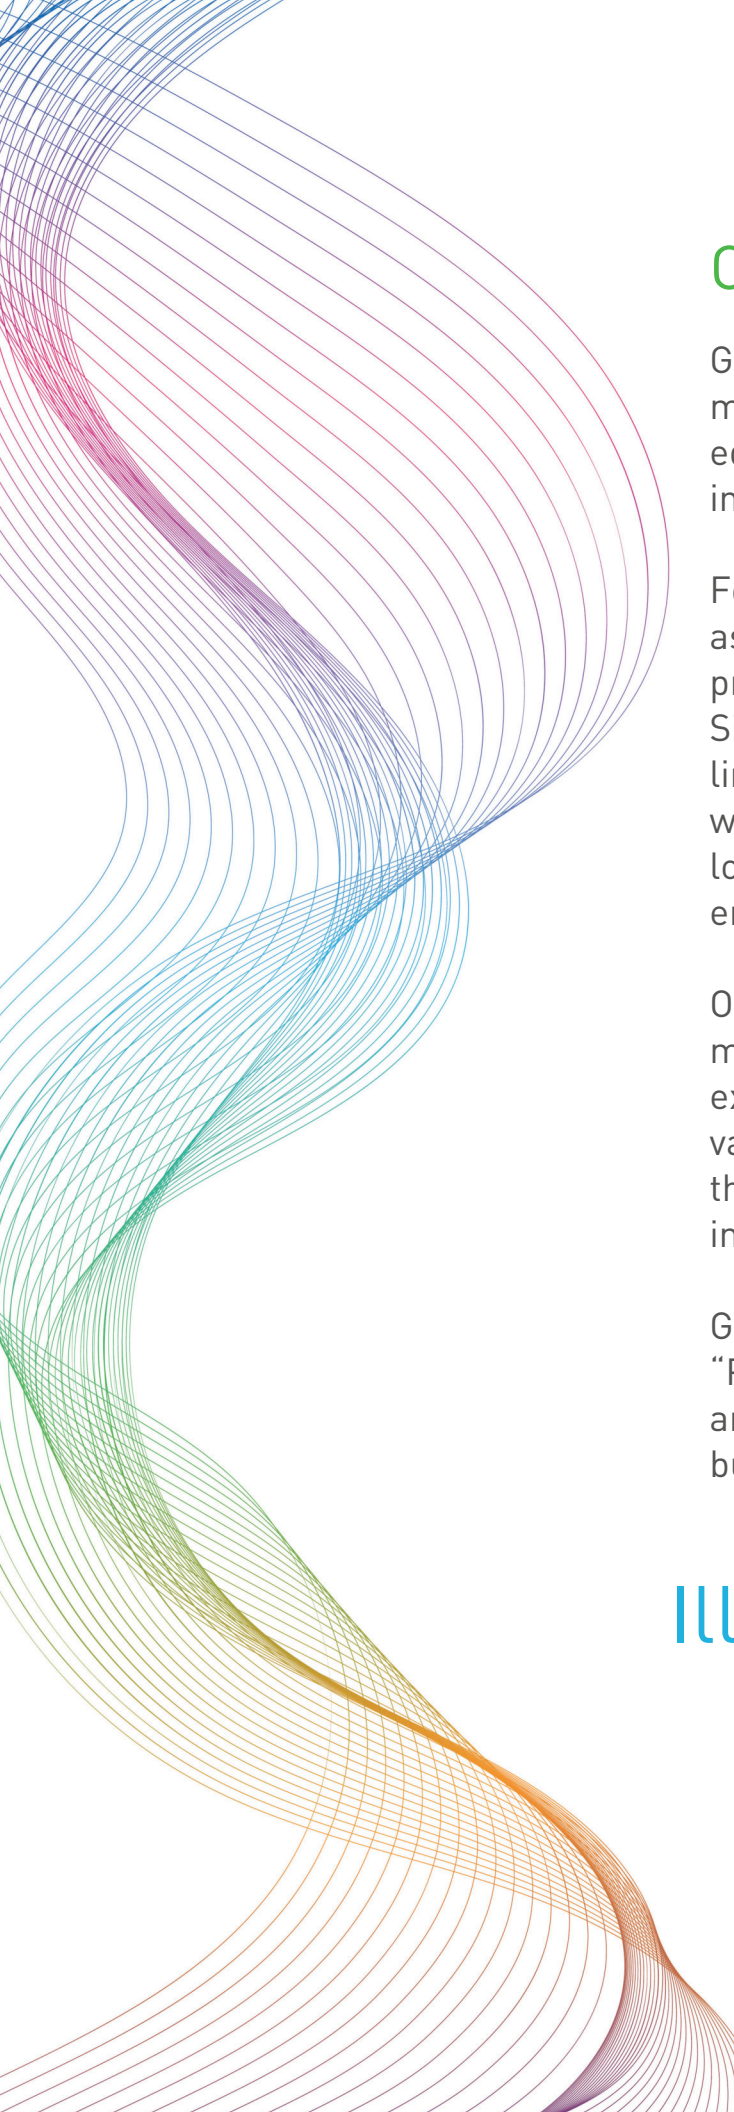

Over A Decade of Gantom

Gantom Lighting & Controls is a leading manufacturer of special-effects lighting equipment for the themed attraction industry.

Founded in 2010 by Quan Gan, we started as Darklight, a small company that provided Halloween lighting solutions. Since then, we have expanded our product line to include innovative and award-winning luminaires that are designed for low-light and space-constrained environments.

Our products are the “secret weapon” of many lighting designers and industry experts, and they have been installed in various venues around the world, such as theme parks, museums, and other immersive environments.

Gantom is a portmanteau of “Gan” and “Phantom”, reflecting our founder’s name and our origins in the Halloween lighting business.

Illuminate and Inspire

Contact Gantom

MAIN PHONE | 661-347-0779

CALIFORNIA OFFICE


25060 Avenue Stanford, Suite 115
Valencia, CA 91355

FLORIDA OFFICE


7091 Grand National Drive, Suite 103
Orlando, FL 32819

GENERAL INQUIRIES		sales@gantom.com
QUOTES/PRICING		quotes@gantom.com
PURCHASE ORDERS		orders@gantom.com
TECHNICAL SUPPORT		support@gantom.com
ACCOUNTING		accounting@gantom.com

SCAN HERE

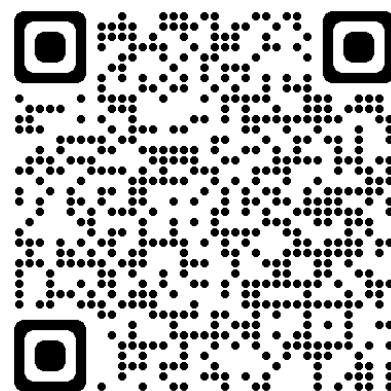

Schedule a online product
demonstration

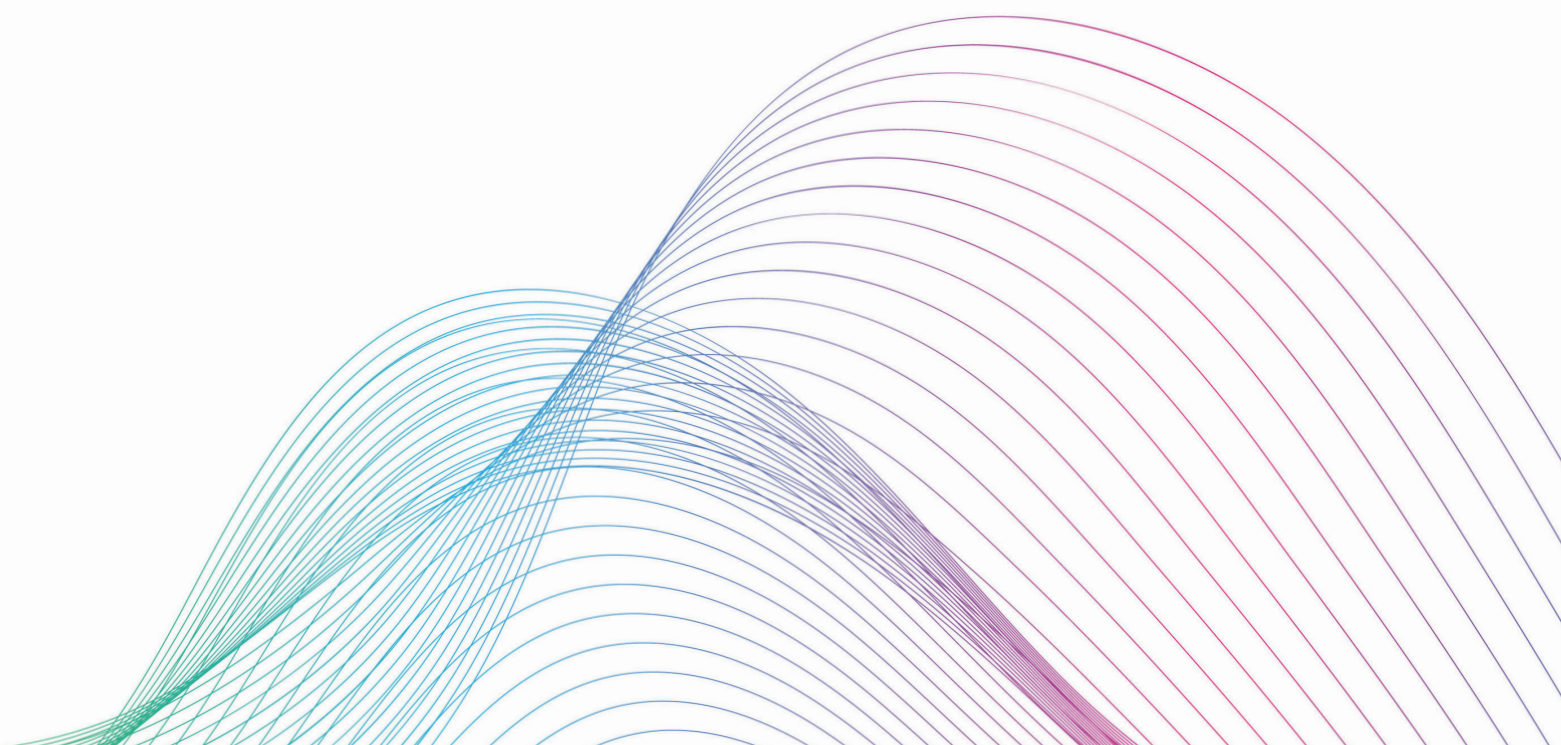

GANTOM ONE UP



Building off the success of the Gantom One, the One Up brings four-color output to this LED pin spot and delivers a tight and punchy beam that produces homogeneous color mixing, even at close distances.

Featuring a native 4.5 degree beam angle, the Gantom One Up includes 4 diffusion filters, hex louver, and optional top hat, half hat, and angled cowlings for easy control over the beam. Its native DMX control and balanced dimming curve make it perfect for even the most demanding of lighting designers.

Whether you're illuminating a small space or a large venue, the Gantom One Up has everything you need to create stunning lighting designs.



scan for product page

PRECISION CP-7



The Precision CP-7 offers precise RGB control with its 7 channel DMX profile and features smooth dimming, variable strobing, color macros, and flicker effects.

This fixture comes bare wire and includes adapters for power and programming allowing for flexibility in permanent and seasonal installations.

With minimal maintenance required and over 50,000-hour lamp life expectancy, this fixture will hold strong through your installations year after year.



scan for product page



GANTOM TRACK

Gantom Track fixtures are now compatible with A.A.G Stucchi track.

Stucchi offers a wide range of products, giving lighting designers more options and flexibility to create stunning designs for their upcoming projects.

For more information on Gantom Track products, please contact us at sales@gantom.com.

A.A.G.
STUCCHI



FIXTURE UPDATES

- ◆◆ Redesign of all 60mm fixtures
- ◆◆ New beam control accessories and threaded retaining ring for 60mm fixtures
- ◆◆ Weatherproof ingress protection kit accessory for 60mm fixtures
- ◆◆ Gantom DMX V2 now IP67 rated
- ◆◆ 90+ CRI for all fixtures with color temperatures 3000k and below



PRECISION SERIES

PRECISION ALPHA

Micro Pinspot



Multi-use spotlight with adjustable angle, brightness, and color with included filters

OPTICS

Beam 13° / Field 28°


ILLUMINANCE

843 lx (78.3 fc) @ 1 Meter

DIMENSIONS

71mm x 34mm x 27mm
2.80" x 1.34" x 1.06"

LED COLOR



Adjustable with Gel Filters

POWER

1.5 watts

IP RATING

IP65

PRECISION Z SPOT

Micro Spotlight



Single color high intensity fixture with far throw and intense color

OPTICS

Beam 11° / Field 32°

ILLUMINANCE

883 lx (82.0 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



POWER

1.5 watts

IP RATING

IP65

PRECISION Z FLOOD

Micro Floodlight



Single color wide beam angle fixture for highlights and area color mixing washes

OPTICS

Beam 62° / Field 84°


ILLUMINANCE

66lx (6.1 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



POWER

1.5 watts

IP RATING

IP65

Z DMX SPOT

Micro DMX Spotlight



Single color DMX dimmable fixture with intense color and throw distance.

OPTICS

Beam 11° / Field 32°


ILLUMINANCE

883 lx (82.0 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



POWER

1.5 watts

IP RATING

IP65

Z DMX FLOOD

Micro DMX Floodlight



DMX controlled micro flood fixture that produces even color washes.

OPTICS

Beam 62° / Field 84°

ILLUMINANCE

66lx (6.1 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



POWER

1.5 watts

IP RATING

IP65

PRECISION CP-7

RGB DMX FX Light



RGB color mixing fixture with strobe light features and built in special effect macros

OPTICS

Beam 18° - Soft Edge Beam

ILLUMINANCE

534lx (49.6 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



POWER

3.3 watts
12 Volt DC Power ONLY

IP RATING

IP60
Indoor Use Only

GANTOM SERIES

Gantom iQ Gobo Projector



Micro LED gobo projector
with zoomable lens

OPTICS

25° to 40°
Adjustable zoom lens

ILLUMINANCE

510 lx (47.4 fc) @ 1 Meter

DIMENSIONS

94mm x 49mm x 50mm
3.7" x 1.93" x 1.97"

LED COLOR



POWER

2.8 watts

IP RATING

IP40
IP65 with FA30 Accessory

Gantom Juni Framing Gobo Projector



The smallest framing
projector in the world with
sharp optics and precise
focus adjustments

OPTICS

25° to 38° - Standard Lens
40° to 60° - Wide Lens

ILLUMINANCE

1620 lx (515 fc) @ 1 Meter

DIMENSIONS

129mm x 89mm x 79mm
5.08" x 3.50" x 3.11"

LED COLOR



POWER

9 watts
12 Volt DC Power ONLY

IP RATING

IP50
Indoor Use ONLY

Gantom One Compact Pinspot



LED pinspot with ultra
narrow beam optics and
included diffusion lenses

OPTICS

Beam 2.7° / Field 4.5°
Diffusible with included filters

ILLUMINANCE

22100lx (2053.2 fc) @ 1 Meter

DIMENSIONS

42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



UV fixtures are made to order

POWER

4.8 watts

IP RATING

IP65
IP67 with FA47 Accessory

Gantom iQx DMX Gobo Projector



Micro LED gobo projector with zoomable lens and effect macros

OPTICS
25° to 40°
Adjustable zoom lens

ILLUMINANCE
510 lx (47.4 fc) @ 1 Meter

DIMENSIONS
94mm x 49mm x 50mm
3.7" x 1.93" x 1.97"

LED COLOR



POWER
2.8 watts

IP RATING
IP40
IP65 with FA30 Accessory

Gantom Juni DMX DMX Framing Gobo Projector



Small DMX controlled framing projector with sharp optics and precise focus adjustments

OPTICS
25° to 38° - Standard Lens
40° to 60° - Wide Lens

ILLUMINANCE
1620 lx (515 fc) @ 1 Meter

DIMENSIONS
129mm x 89mm x 79mm
5.08" x 3.50" x 3.11"

LED COLOR



POWER
9 watts

IP RATING
IP50
Indoor Use ONLY

Gantom One DMX DMX Compact Pinpoint



DMX controlled LED pinpoint with ultra narrow beam optics in a compact formfactor

OPTICS
Beam 2.7° / Field 4.5°
Diffusible with included filters

ILLUMINANCE
22100lx (2053.2 fc) @ 1 Meter

DIMENSIONS
42mm x 40mm x 50mm
1.65" x 1.57" x 1.96"

LED COLOR



UV fixtures are made to order

POWER
4.8 watts

IP RATING
IP65
IP67 with FA47 Accessory

GANTOM SERIES

Gantom One Up DMX RGBW Pinspot



RGBW color mixing ultra narrow beam pinspot fixture with DMX dimming

OPTICS

Beam 4.5° / Field 12.7°
Diffusible with included filters

ILLUMINANCE

17284 lx [1603.4 fc] @ 1 Meter

DIMENSIONS

88mm x 60mm x 60mm
3.35" x 2.36" x 2.36"

LED COLOR



POWER

5.5 watts

IP RATING

IP65

IP67 with FA47 Accessory

DMX V2 RGBW RGBW Spotlight



Compact DMX spotlight with smooth dimming and RGBW color mixing

OPTICS

Beam 16° / Field 32°
Diffusible with included filters

ILLUMINANCE

883 lx [82 fc] @ 1 Meter

DIMENSIONS

58mm x 49mm x 63mm
2.28" x 1.93" x 2.48"

LED COLOR



POWER

4.8 watts

IP RATING

IP67

DMX V2 DW Dynamic White Spotlight



Compact DMX spotlight with tunable white color temperature control

OPTICS

Beam 16° / Field 32°
Diffusible with included filters

ILLUMINANCE

883 lx [82 fc] @ 1 Meter

DIMENSIONS

58mm x 49mm x 63mm
2.28" x 1.93" x 2.48"

LED COLOR



2650K to 6000K Adjustable

POWER

4.8 watts

IP RATING

IP67

Gantom 7

7 Color DMX Spotlight



Versatile fixture with full color and beam control designed to handle all theatrical lighting needs

OPTICS

Beam 15° / Field 35°
Diffusible with included filters


ILLUMINANCE

650 lx (60.4 fc) @ 1 Meter

DIMENSIONS

88mm x 60mm x 60mm
3.35" x 2.36" x 2.36"

LED COLOR



POWER

7.5 watts

IP RATING

IP65

IP67 with FA47 Accessory

Gantom R4 RGBW

DMX RGBW Recessed Light



Compact recessed fixture with adjustable optics, smooth dimming, and excellent color mixing

OPTICS

Beam 16° / Field 32°
Diffusible with included filters

ILLUMINANCE

883 lx (82 fc) @ 1 Meter

DIMENSIONS

70mm x 55mm x 40mm
2.76" x 2.17" x 1.57"

LED COLOR



POWER

4.8 watts

IP RATING

IP60

Indoor Use ONLY

Gantom R4 DW

Dynamic White Recessed Light



Compact recessed fixture with adjustable optics, smooth dimming, and tunable color temperature

OPTICS

Beam 16° / Field 32°
Diffusible with included filters


ILLUMINANCE

883 lx (82 fc) @ 1 Meter

DIMENSIONS

70mm x 55mm x 40mm
2.76" x 2.17" x 1.57"

LED COLOR



2650K to 6000K Adjustable

POWER

4.8 watts

IP RATING

IP60

Indoor Use ONLY

SYSTEM COMPONENTS

GP002

Indoor/Outdoor Field Install Distribution Box



Designed to fit your application, this G8 Distribution Box allows you to tailor your Gantom Pro Cable system to your needs

DIMENSIONS 204mm x 200mm x 92mm
8.03" x 7.87" x 3.62"

POWER INPUT 12-24VDC, 5A maximum

IP RATING IP67

COMPATIBLE COMPONENTS **Branch Cables:**
CB141, CB138, CB132, CB133, CB134

Power Supplies:
PP33, PP35

GP003

Indoor Plug-and-Play Distribution Box



Quick and easy to set up, the Plug-and-Play G8 makes Pro Cable quick and secure to use

DIMENSIONS 200mm x 94mm x 65mm
7.87" x 3.70" x 2.56

POWER INPUT 12-24VDC, 5A maximum

IP RATING IP40

COMPATIBLE COMPONENTS **Branch Cables:**
CB139, CB130, CB131

Power Supplies:
PP31, PP33, PP35

GP004

Indoor/Outdoor Plug-and-Play Distribution Box



The power of the G8 Distribution Box with the versatility of Trunk Cable - Compatible with T Connectors and related accessories

DIMENSIONS 200mm x 94mm x 65mm
7.87" x 3.70" x 2.56

POWER INPUT 12-24VDC, 7A maximum

IP RATING IP60
IP65 with CB147 Caps

COMPATIBLE COMPONENTS **Trunk Cables:**
CB129, CB120, CB121, CB122, CB137

Branch Cables:
CB139, CB130, CB131

Power Supplies:
PP33, PP35, PP36

CB124

T Connector with Integrated DMX Repeater



Individual fixture power and data distribution with Trunk Cable connections allow for flexible system layouts

DIMENSIONS 119mm x 64mm x 24mm
4.67" x 2.50" x 0.94"

POWER INPUT 12-24VDC, 7A maximum

IP RATING IP65

COMPATIBLE COMPONENTS **Trunk Cables:**
CB129, CB120, CB121, CB122, CB137

Branch Cables:
CB139, CB130, CB131

Power Supplies:
PP33, PP35, PP36

PowerPak Mini

12 Watt 1 Amp



INPUT 100-200 VAC

OUTPUT 12VDC

PowerPak 5000

60 Watt 5 Amp



INPUT 100-265 VAC

OUTPUT 12VDC

PowerPak Pro

60 Watt 5 Amp - IP67



INPUT 100-200 VAC

OUTPUT 12VDC

PowerPak Max

200 Watt 8.33 Amp - IP67



INPUT 100-305 VAC

OUTPUT 24VDC

PowerPak Plug & Play

60 Watt 5 Amp - DMX Injection



INPUT 100-277 VAC

OUTPUT 24VDC

DarkBox Programmer V2

Standalone Programming Device



Simple and reliable way to configure the settings of Gantom fixtures.

FEATURES Battery Operated
USB C Charging
Pro Cable Connector
Easy to use Interface


SCAN TO LEARN MORE ABOUT
GANTOM SYSTEMS



Pro Cable



Go Cable

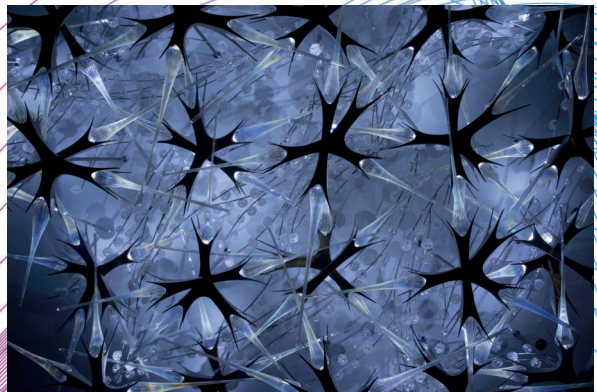

Have you used Gantom fixtures on a project recently?

We are looking for case studies to highlight our products in action! If you have something you are able to share, please email us at sales@gantom.com and tell us about your project.

We look forward to seeing what you have been working on.

Team Gantom





www.gantom.com | sales@gantom.com
25060 Avenue Stanford, Suite 115, Valencia, CA 91355
Ph. (661) 347-0779