



POI-75 Wash

RGBW LED Wash Light



Description

The POI-75 Wash is part of SGM's POI family—built-to-last and easy-to-install fixtures designed to withstand any outdoor environment. With five fixture sizes, multiple lens options, integrated control, built-in power, and glare accessories, the POI family offers versatile, configurable solutions for projects of any scale. Every POI fixture is factory colour-calibrated, ensuring colour consistency in both multi-colour and white mixes across all products in the POI family.

Features and benefits

- ✓ Up to 3792 lumen at 4000K calibrated white
- ✓ Factory colour-calibrated ensuring colour consistency
- ✓ Made with recycled aluminium
- ✓ RGBW quad-chip LEDs with 3000K and 4000K white options
- ✓ Integrated wireless DMX and AirGlow options
- ✓ Built-in power supply

Certifications & classifications







IP66
INGRESS

C5
CORROSION

IK08
IMPACT

UV
RESISTANT

RoHS
COMPLIANT

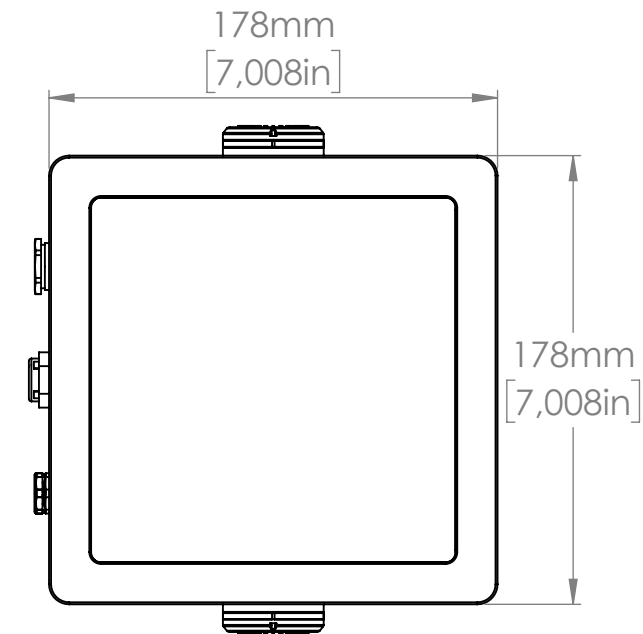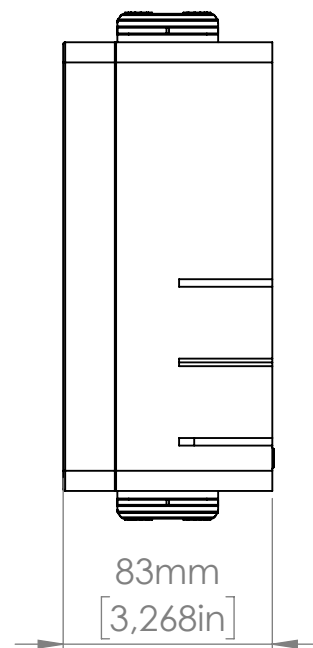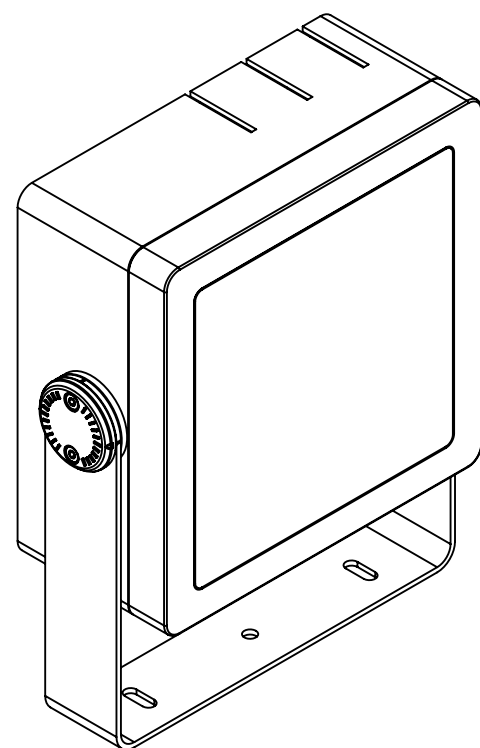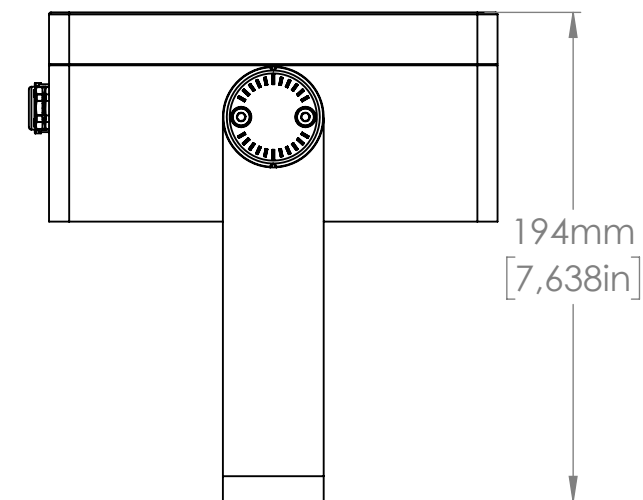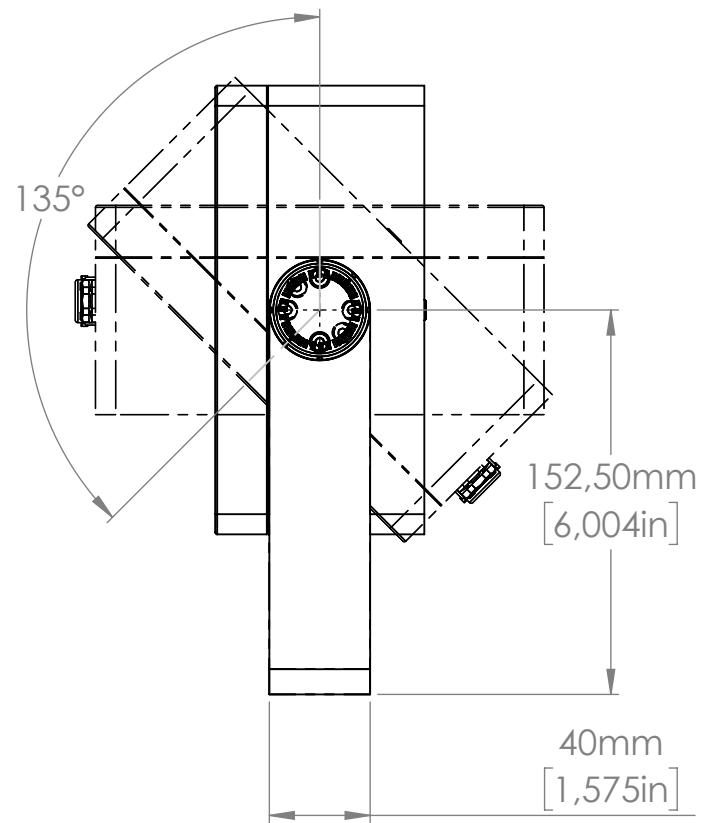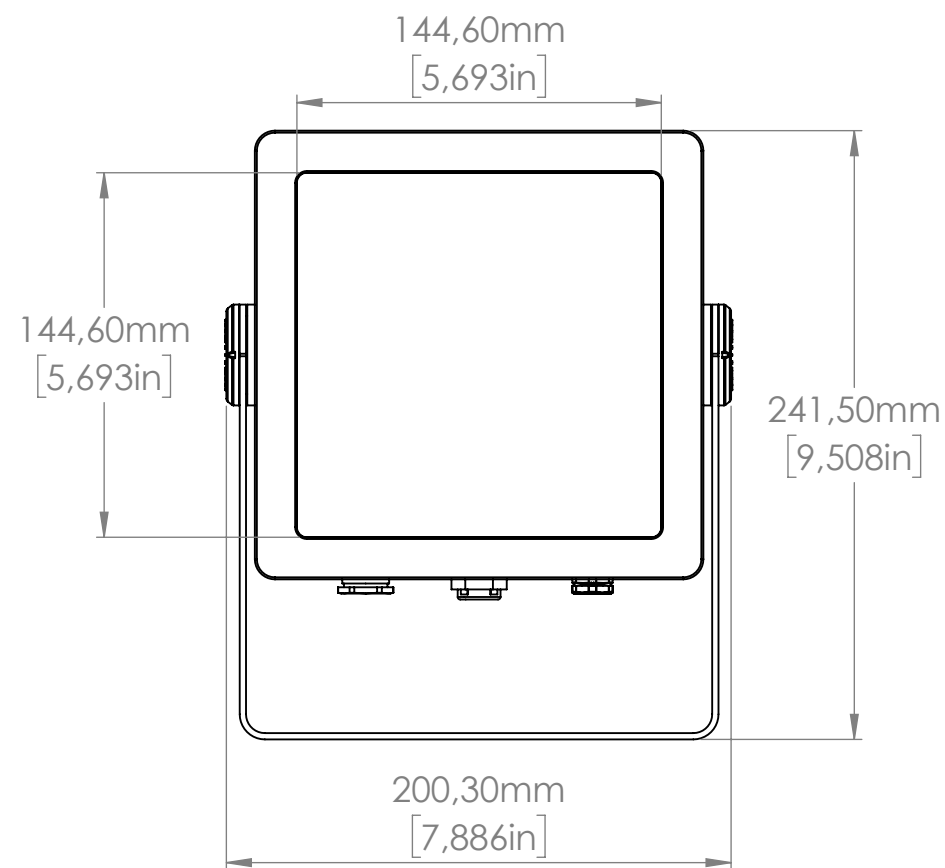

Specification

Optical Data

LED expected lifetime (L70)	150.000 hours (Projected, under manufacturer's conditions)
Lightsources	RGBW3K (quad-chip) RGBW4K (quad-chip)
Native lens options	35° 25° 10° 100° 60° 10x60° 60x10°

Photometric

CRI	Up to 80
Efficacy	51 lm/W
Light output - all on	3792 lm @ 4000K calibrated
Light output - blue	562 lm
Light output - green	3160 lm
Light output - red	1549 lm

Physical

Color options	Custom color - Any RAL Grey - RAL 7037
Corrosion class	C5 (ISO 12944)
IK rating	IK08
IP class	IP66
Lens material	Tempered glass front
Material	Aluminium Plastic Stainless steel Recycled aluminium
Net dimensions L x H x W	200.5 x 241.5 x 83 mm
Net dimensions L x H x W (inches)	7.9 x 9.5 x 3.3 inches
Net weight	2.3 kg (5.1 lbs)
Vibration Rating	3G (Optional)

Electrical

Input voltage, nominal	100 - 277 VAC; 50 / 60 Hz
Max power consumption	75 W

Programming and Control

Protocol	CRMX, W-DMX™ G2, W-DMX™ G3, W-DMX™ G4, W-DMX™ G4S USITT DMX512A RDM ANSI E1.20 Lumenradio AirGlow™
Setting and addressing	RDM ANSI E1.20

	Standalone mode	Quick Color
Connections	DMX data in/out	1.5 meter cable for DMX In and DMX Thru
	Power	Power cable 1.5m with bare ends
Thermal	Cooling	Passive
	Temperature range, operating	-40°C to 50°C
	Temperature range, operating max	50 °C
	Temperature range, operating min	-40 °C
	Temperature range, start-up	-20°C to 50°C
	Temperature range, storage	-40°C to 80°C
	Total heat dissipation, max power	255.9 BTU per hour

Ordering information

Qty	Product name	Item number
☐	POI-75 Wash, RGBW4K, 10°, GR, DMX	80300200
☐	POI-75 Wash, RGBW4K, 25°, GR, DMX	80300201
☐	POI-75 Wash, RGBW4K, 35°, GR, DMX	80300202
☐	POI-75 Wash, RGBW4K, 60°, GR, DMX	80300203
☐	POI-75 Wash, RGBW4K, 100°, GR, DMX	80300204
☐	POI-75 Wash, RGBW4K, 10x60°, GR, DMX	80300205
☐	POI-75 Wash, RGBW4K, 60x10°, GR, DMX	80300206
☐	POI-75 Wash, RGBW4K, 10°, GR, CRMX	80300207
☐	POI-75 Wash, RGBW4K, 25°, GR, CRMX	80300208
☐	POI-75 Wash, RGBW4K, 35°, GR, CRMX	80300209
☐	POI-75 Wash, RGBW4K, 60°, GR, CRMX	80300210
☐	POI-75 Wash, RGBW4K, 100°, GR, CRMX	80300211
☐	POI-75 Wash, RGBW4K, 10x60°, GR, CRMX	80300212
☐	POI-75 Wash, RGBW4K, 60x10°, GR, CRMX	80300213
☐	POI-75 Wash, RGBW4K, 10°, GR, AirGlow	80300214
☐	POI-75 Wash, RGBW4K, 25°, GR, AirGlow	80300215
☐	POI-75 Wash, RGBW4K, 35°, GR, AirGlow	80300216
☐	POI-75 Wash, RGBW4K, 60°, GR, AirGlow	80300217
☐	POI-75 Wash, RGBW4K, 100°, GR, AirGlow	80300218
☐	POI-75 Wash, RGBW4K, 10x60°, GR, AirGlow	80300219
☐	POI-75 Wash, RGBW4K, 60x10°, GR, AirGlow	80300220
☐	POI-75 Wash, RGBW3K, 10°, GR, DMX	80300221
☐	POI-75 Wash, RGBW3K, 25°, GR, DMX	80300222
☐	POI-75 Wash, RGBW3K, 35°, GR, DMX	80300223
☐	POI-75 Wash, RGBW3K, 60°, GR, DMX	80300224
☐	POI-75 Wash, RGBW3K, 100°, GR, DMX	80300225
☐	POI-75 Wash, RGBW3K, 10x60°, GR, DMX	80300226
☐	POI-75 Wash, RGBW3K, 60x10°, GR, DMX	80300227
☐	POI-75 Wash, RGBW3K, 10°, GR, CRMX	80300228
☐	POI-75 Wash, RGBW3K, 25°, GR, CRMX	80300229
☐	POI-75 Wash, RGBW3K, 35°, GR, CRMX	80300230
☐	POI-75 Wash, RGBW3K, 60°, GR, CRMX	80300231
☐	POI-75 Wash, RGBW3K, 100°, GR, CRMX	80300232

☐	POI-75 Wash, RGBW3K, 10x60°, GR, CRMX	80300233
☐	POI-75 Wash, RGBW3K, 60x10°, GR, CRMX	80300234
☐	POI-75 Wash, RGBW3K, 10°, GR, AirGlow	80300235
☐	POI-75 Wash, RGBW3K, 25°, GR, AirGlow	80300236
☐	POI-75 Wash, RGBW3K, 35°, GR, AirGlow	80300237
☐	POI-75 Wash, RGBW3K, 60°, GR, AirGlow	80300238
☐	POI-75 Wash, RGBW3K, 100°, GR, AirGlow	80300239
☐	POI-75 Wash, RGBW3K, 10x60°, GR, AirGlow	80300240
☐	POI-75 Wash, RGBW3K, 60x10°, GR, AirGlow	80300241
☐		
Accessories		Item number
☐	POI-75 Wash Half Anti-glare Shield	83063110
☐	POI-75 Wash Full Anti-glare Shield	83063111
☐		



Headquarter +45 70 20 74 00

Mail info@sgmlighting.com

Website sgmlight.com